



“ For over a decade Coolspirit have been supplying the UK’s top organisations with storage products and solutions so be assured we will meet your requirements head on.

It’s all about getting things right first time, quickly and simply! ”

Damon Robertson
Coolspirit Ltd

Our address

24 The Bridge Business Centre
Beresford Way
Chesterfield
S41 9FG

Get in touch

Call us on: 01246 454222
Email us: web@coolspirit.co.uk
Find us: [View location map](#)
Web: www.coolspirit.co.uk

Office hours

mon - thurs 8:30am - 5:30pm
fri 8:30am - 5pm
sat - sun Closed


“ Boost your storage buying power...
use ours! ”

Buy with confidence from
Coolspirit your authorised
HP Partner




Overview

The HP MSL Tape Libraries meet demanding storage requirements of businesses needing unattended backup, disaster recovery, or archive capability. The MSL Libraries offer a broad choice of storage capacity and interfaces with LTO-5, LTO-4, or LTO-3 Ultrium tape drives. Web-based remote management makes the MSL Libraries easily managed from across the room or across the globe, eliminating the need for remote office IT staff. Quickly and simply manage the tape media both in and out of the library with the standard bar code reader, configurable mail slots, and multiple 12-slot removable magazines. If a tape were lost or stolen, protect important business data from unauthorized access with the library-based encryption option. Library investment and uncertain data growth are easily managed with MSL accessory kits. Quickly increase capacity and/or performance with tool-free drive upgrades, slot license capacity upgrades, or library expandability. Now with TapeAssure to monitor drive and media utilization, monitor operational performance, report life and health information as well as provide notifications of drive and tape parameters that fall below HP recommended standards.

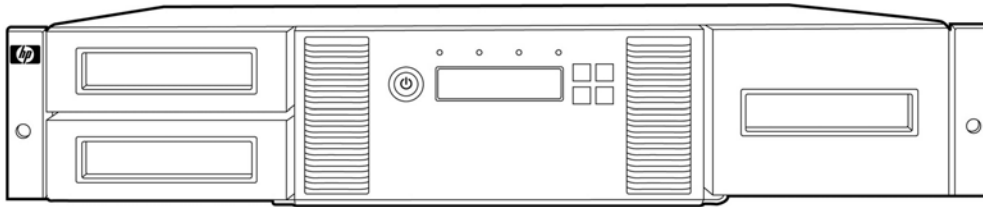


HP MSL2024 Tape Library

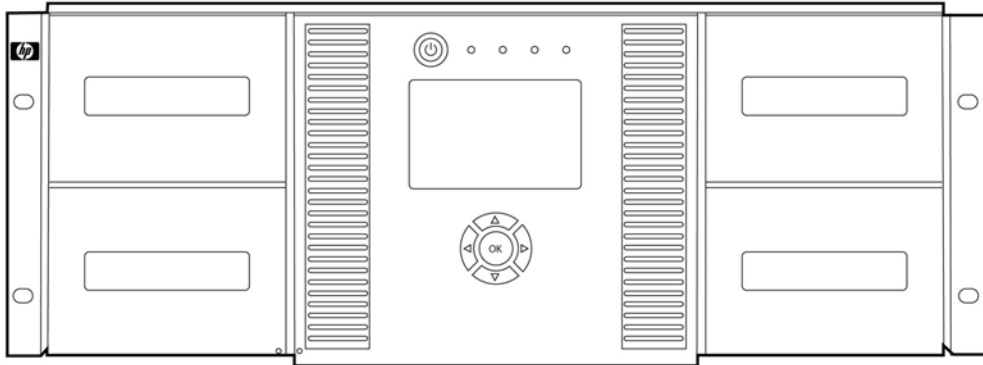

HP MSL4048 Tape Library

Overview

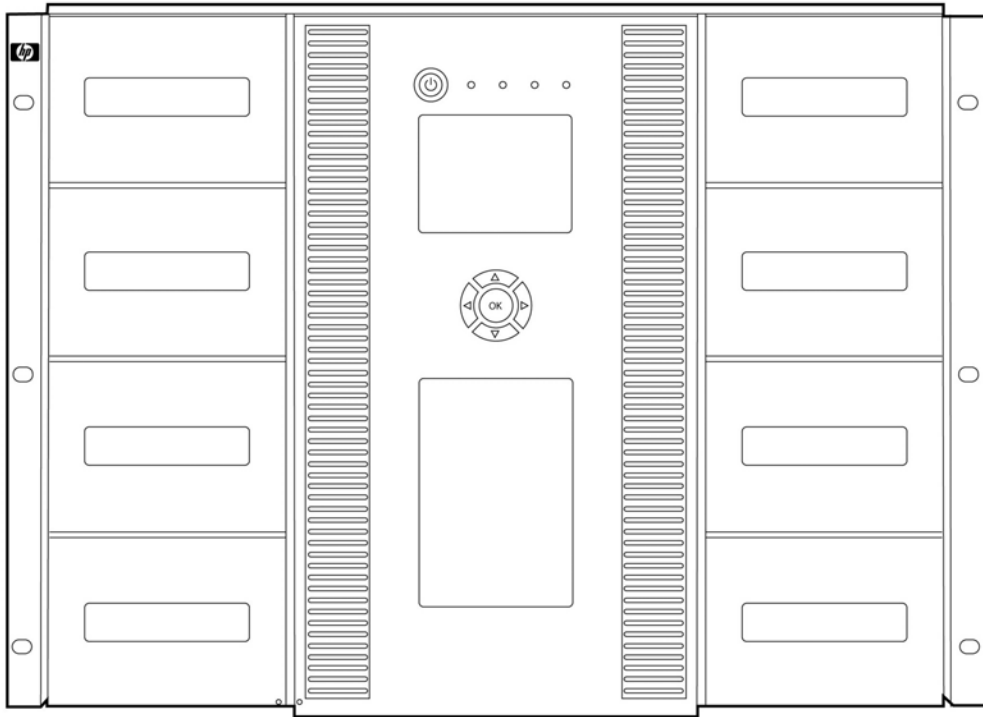

HP MSL8048/8096 Tape Library

What's New

- LTO-5 Ultrium 3000 FC tape drives are now available in the MSL tape library family doubling FC drive density in the MSL 2024 and the MSL4048.

Key Features

- Exceptional storage density from 4.8 TB (2024) up to 288 TB of compressed capacity (2:1) in 8096
- Achieve up to 432 TB of storage capacity with the MSL Library Extender Kit
- Easy-to-use web-based remote management
- Integrated bar code reader
- Tool-free tape drive upgrades
- Customer upgradeable redundant power supply in the MSL 4048, 8048, or 8096 libraries.
- Multiple interface choices available (FC, SAS, or SCSI)
- Removable magazines with user-configurable mail slots
- Easy-to-enable AES 256-bit embedded hardware encryption with compression
- Extensive OS and software compatibility testing
- Proven high reliability
- Proactive drive and media health and operational performance reporting with TapeAssure.
- Includes HP Data Protector Express Basic backup and recovery software.
- Achieve the highest level of encryption security to secure confidential business information while meeting compliance guidelines with the HP 1/8 G2 & MSL Encryption Kit.
- Proactively monitor utilization, operational performance, and overall life and health of the drives and media with TapeAssure.
- Leverage library investment to upgrade to higher performance and capacity points using the MSL



Overview

Library Extender.

- Grow library capacity without adding additional hardware with the MSL8048 slot license upgrade option. Quick, easy, and affordable capacity growth.

Family Comparison	MSL2024	MSL4048	MSL8048/8096
Drive Technology	LTO-5 Ultrium 3280 LTO-5 Ultrium 3000 LTO-4 Ultrium 1840 LTO-4 Ultrium 1760 LTO-3 Ultrium 960 LTO-3 Ultrium 920	LTO-5 Ultrium 3280 LTO-5 Ultrium 3000 LTO-4 Ultrium 1840 LTO-4 Ultrium 1760 LTO-3 Ultrium 960 LTO-3 Ultrium 920	LTO-5 Ultrium 3280 LTO-5 Ultrium 3000 LTO-4 Ultrium 1840 LTO-4 Ultrium 1760 LTO-3 Ultrium 960
Maximum Number of Drives	1 (Ultrium 3280, 1840, 960) 2 (Ultrium 3000, 1760, 920)	2 (Ultrium 3280, 1840, 960) 4 (Ultrium 3000, 1760, 920)	4 (Ultrium 3280, 3000, 1840, 1760, 960)
Maximum Capacity (2:1 compression)	72 TB (LTO-5) 38.4 TB (LTO-4) 19.2 TB (LTO-3)	144 TB (LTO-5) 76.8 TB (LTO-4) 38.4 TB (LTO-3)	288 TB (LTO-5, 96 slots) 153.6 TB (LTO-4, 96 slots) 76.8 TB (LTO-3, 96 slots) 144 TB (LTO-5, 48 slots) 76.8 TB (LTO-4, 48 slots) 38.4 TB (LTO-3, 48 slots)
Maximum Data Transfer (2:1 compression)	1 TB/hr (one 3280/3000) 864 GB/hr (one 1840) 576 GB/hr (one 1760) 576 GB/hr (one 960) 864 GB/hr (two 920)	1.0 TB/hr (one 3280) 2.0 TB/hr (two 3000) 864 GB/hr (one 1840) 1.7 TB/hr (two 1840) 1.1 TB/hr (two 1760) 1.1 TB/hr (two 960) 432 GB/hr (one 920) 864 GB/hr (two 920)	2.0 TB/hr (two 3280/3000) 4.0 TB/hr (four 3280/3000) 1.7 TB/hr (two 1840) 3.4 TB/hr (four 1840) 1.1 TB/hr (two 1760) 1.1 TB/hr (two 960) 2.3 TB/hr (four 960)
Drive Interface	8 Gb Native Fibre Channel (LTO 5 only) 4 Gb Native Fibre Channel (LTO 5, 4, 3) 6 Gb/sec SAS (LTO 5 only) 3 Gb/sec SAS (LTO 5, 4, 3) Ultra320 LVD SCSI (LTO 4, 3)	8 Gb Native Fibre Channel (LTO 5 only) 4 Gb Native Fibre Channel (LTO 5, 4, 3) 6 Gb/sec SAS (LTO 5 only) 3 Gb/sec SAS (LTO 5, 4, 3) Ultra320 LVD SCSI (LTO 4, 3)	8 Gb Native Fibre Channel (LTO 5 only) 4 Gb Native Fibre Channel (LTO 5, 4, 3) 6 Gb/sec SAS (LTO 5 only) 3 Gb/sec SAS (LTO 5, 4, 3) Ultra320 LVD SCSI (LTO 4, 3)



Product Highlights

Manageability

The MSL Tape Libraries come with web-based remote manageability so they can be easily monitored and managed from across the room or across the globe. Functions included in the management tool include:

- Status information on the drive and system
- System configuration operations and reporting
- System error and status logs
- Library and drive firmware upgrade capabilities
- Diagnostic tests and information
- Cartridge movement for maintenance and management purposes
- Cleaning cartridge support
- Security and access control
- SNMP support for IP communication
- Partitioning and Encryption management
- HTTPS capable
- IPv6 and IPv4 network protocol support

TapeAssure

HP TapeAssure makes managing, optimizing and archiving on the HP MSL 2024, 4040, 8048 or 8096 libraries faster and easier. TapeAssure provides comprehensive summaries and detailed information about the status, performance, utilization, and health of all tape drives and tapes for HP MSL libraries. TapeAssure utilization and performance reporting features allow you to optimize the use of your existing HP MSL tape libraries to make informed purchasing decisions if an increase in capacity is needed. With TapeAssure data you can:

- Modify backup schedules to make best use of the drives and tapes available and evenly distribute their workload
- Predict and prevent failures through early warnings and recommended service actions
- Determine if each drive and each tape is experiencing a high (or low) rate of usage
- Know when to retire tapes
- Find out the compression ratios actually achieved

TapeAssure health reports and alerts give you peace of mind knowing the condition of the drives, the tapes and the data on each tape. TapeAssure monitors every backup to ensure the highest standards of reliability, sends alerts when these standards are not met, and ensures that you can maintain the drives and tapes used in an archive environment to have the highest integrity.

TapeAssure builds a database of drive and tape history information that you can export as .CSV (comma-separated-value) files and import into Excel or other tools to create pivot-charts, pie charts and bar charts for graphical presentation or further analysis. This data can be automatically exported on a schedule or on demand and written to a local or network drive where analysis scripts can also be run.

TapeAssure real time alerts notify instantly if drive and data quality standards are not being achieved:

- In-depth analysis pinpoints if drive, tape or data characteristics fall below HP backup and archiving standards
- View alerts and statistics is real-time in the Command View TL GUI

NOTE: an alert does not imply that a failure has occurred as HP backup and archiving standards are very high. This allows you to treat many of the alerts as predictive and to follow up on the recommended service actions at a time that is least disruptive.



Product Highlights

Easy Installation

The MSL Tape Libraries are shipped as a rack-ready unit. The rack mount hardware included with the library allows installation in a variety of HP racks which include the 10000 series, 9000 series, 5000 series or System/E racks.

Partitioning

The MSL Tape Libraries now include the ability to be configured as a partitioned library. Most MSL Libraries may be configured as up to one partition per drive; four partitions if four drives are installed.. Partitioning allows each partitioned library to be presented to the host as an independent library, separate from other partitions in the library. Hosts for each partition own independent sets of media and can use ISV software that is different from the other partitions allowing maximum flexibility and utilization of the MSL library.

NOTE: The MSL 8048 can only be partitioned into a maximum of two partitions, while the MSL8096 can be partitioned into four partitions.

Proven Reliability

With a rating of 2,000,000 robot load/unload cycles, the MSL Tape Libraries provides necessary high reliability for today's demanding environment. To improve reliability and longevity, all HP Ultrium products feature Data Rate Matching (DRM). This allows the tape drive to dynamically and continuously adjust the speed of the drive, to match the speed of the host or network. This increases performance, reduces mechanical wear on the tape drive and extends tape life.

Data Encryption

The HP 1/8 G2 & MSL Encryption Kit provides a library-enabled encryption solution providing data privacy, confidentiality, and integrity of your critical business data while supporting compliance requirements. The HP 1/8 G2 & MSL Encryption Kit is an easy and affordable library-enabled encryption solution for small businesses.

Protect the confidentiality and integrity of your data:

The encryption kit includes two USB key server tokens, product documentation, and firmware support. One encryption kit is needed per library or autoloader. One USB key server token is installed in the USB port of the library to enable encryption. The token must remain in the tape library or tape autoloader while encryption is enabled. The USB key server token generates and stores keys for the LTO-5 or LTO-4 Ultrium drives. The USB key server token uses a hardware random number generator, a cryptographic module running on FIPS 140-2 Level 3 validated hardware, password authentication, and digital envelopes for strong encryption keys and security operations. A second USB key server token is provided in the kit to be used as a backup token which can be stored in a secure location. The keys are transferred securely token-to-token for backup or export, with no exposure to insecure PCs, servers, or networks. An option is also provided to save the token contents to a secure file. You may now also save the most recently added keys on the token to a file to enable you to seed new tokens with keys from other tokens. The encryption kit provides a self-contained solution for MSL libraries with no additional software, PCs, or servers required or involved.

Protect IT resources and meet compliance requirements:

With the HP 1/8 G2 & MSL Encryption Kit, users can enable or disable encryption, configure and manage the USB key server tokens, restore encrypted data, as well as a variety of other tasks. In addition, the LTO-5 and LTO-4 Ultrium tape drives use the Advanced Encryption Standard (AES) with the longest and most secure keys -- 256 bits. AES-256 encryption is implemented using the Galois Counter Mode (GCM). This method adds Message Authentication Codes to ensure the integrity as well as privacy of the backup data stored on tape. The HP LTO-5 and LTO-4 Ultrium Tape Drives are designed to be compliant with the emerging standard for tape media security (IEEE 1619.1).



Product Highlights

Slot license upgrade

Leverage the MSL8048 library investment to address both current and future data requirements with the MSL 48 to 96 slot license upgrade option. Using all the same features of the MSL8096, the MSL8048 will ship with 96 slots physically installed but only 48 are usable, until you decide you need more. As your data grows, simply enable the remaining 48 slots with a slot license upgrade.

The MSL8048 will ship with the four left 12-slot magazines enabled and ready for use, including 3 mail slots. Once additional slots are needed, the library will need the MSL 48 to 96 slot license upgrade (product # TA739A) to quickly and easily double capacity from 48 to 96 slots. The slot license upgrade entitlement certificate will direct you to the HP Webware site for access to your license key. Insert the license key into the library GUI interface and the remaining four right 12-slot magazines, with additional mail slot capability, will now be enabled for use. No reconfiguring a rack or installing new hardware. In addition, once all 96 slots have been enabled, additional capacity and performance can be added using the MSL Library Extender. The HP MSL8048 makes capacity growth easy, quick, and affordable.

Library Extender

Leverage the investment in your MSL Library, now or in the future, to increase both capacity and performance as data needs change. The HP MSL Library Extender Kit can be used to connect two MSL libraries to create one larger, logical library. The stacked libraries appear to the host as a single library. The Extender Kit can be used with MSL2024, 4048, or 8096 libraries and is compatible with both new and currently installed libraries. The Extender Kit is customer installable in under 60 minutes.

The Library Extender occupies the lowest half-height drive bay in the top library and the upper half-height drive bay of the lower library. No additional external power or communication cabling is necessary. The upper Library (MSL4048 or MSL8096) controls the extended library. Any drive in the extended library may host the library interface. Only the operator control panel (OCP), USB port, and Ethernet connection of the upper library are used in the extended mode.

The Library Extender Kit does not support combining two MSL2024 or two MSL8096 libraries. The Extended Library will not support partitioning.

Possible configurations include:

Extended Library Configurations		Slot Numbers (without mail slots enabled)	
Lower Library	Master Library	Lower Library	Master Library
MSL2024	MSL4048	1-24	25-72
MSL4048	MSL4048	1-48	49-96
MSL2024	MSL8096*	1-24	25-120
MSL4048	MSL8096*	1-48	49-144

*In configurations with an 8U library, the 8U must always be the top library

NOTE: An MSL8048 must have all 96 slots enabled before using the Library Extender. Once all 96 slots are usable, configurations are the same as the MSL8096.

Serviceability

Modular in design, the MSL Tape Libraries has easily replaceable components minimizing the Mean-Time-to-Repair on the unit. Replaceable components include the tape drive, the magazines, the power supply and the controller board. HP Library and Tape Tools (L&TT) provides easy access to the MSL error log, generates support tickets, and enables firmware downloads. L&TT can be downloaded for free at: <http://www.hp.com/support/tapetools>.



Product Highlights

LTO Ultrium Technology HP LTO (Linear Tape Open) Ultrium Tape Drives use best of breed technology. By taking the best features from other tape technologies and combining them into a single new technology, Ultrium tape drives are in a league of their own. Inclusion of innovative features such as Adaptive Tape Speed (ATS) ensure that Ultrium drives can meet the performance and reliability demands of a library environment. LTO technology is an open industry standard format; thus data written on HP Ultrium Tape Drives can be interchanged directly with Ultrium Tape Drives from other vendors.

Data Rate Matching

Data Rate Matching combines sophisticated buffer management with HP's exclusive variable Adaptive Tape Speed technology, to allow the tape drive to match its transfer rate to the host speed dynamically and continuously across the wide range of transfer rates. This feature ensures that the tape drive continues to stream data regardless of the environment, and brings two big advantages:

- It optimizes backup performance and maximizes overall efficiency allowing the drive to respond immediately to any speed changes from the host
- It minimizes rewinding and repositioning of the tape, significantly reducing physical wear and increasing reliability
- It minimizes the power requirements for the drive by reducing the number of repositions needed

LTO Ultrium Tape Drive	ATS data transfer rate range (native)
HP LTO-5 Ultrium 3280/3000	47 to 140 MB/s
HP LTO-4 Ultrium 1840	40 to 120 MB/s
HP LTO-4 Ultrium 1760	35 to 80 MB/s
HP LTO-3 Ultrium 960	35 to 80 MB/s
HP LTO-3 Ultrium 920	26 to 60 MB/s

HP Ultrium WORM

Critical to the success of data retention policies in highly regulated environments is the ability to store and manage data in an unalterable state. Following stringent guidelines set forth by regulatory agencies such as the SEC and HIPPA, IT organizations must now integrate new solutions and policies that can verify the integrity of stored data for periods that can extend well beyond seven years.

The LTO-5, LTO-4 Ultrium and LTO-3 Ultrium tape drives features the ability to archive and store data in a non-rewriteable format that meets the most stringent regulatory guidelines. Using a combination of integrated fail-safe features in the drive firmware, cartridge memory, and tape formatting, the tape drives can archive large amounts of data for periods of up to 30 years in a secure, untampered state. Since all LTO-5, LTO-4 and LTO-3 Ultrium tape drives include support for both rewritable and WORM media, IT organizations can now easily integrate a secure, long-term archiving solution into their current data protection strategy. As compared to other technologies that feature support for WORM storage, the tape drives offer the advantages of:

- A single drive to support all backup and archiving needs
- Two distinctive tape cartridges to easily distinguish and manage both rewriteable and WORM data cartridges
- A specially designed WORM data cartridge with multiple integrated fail-safe features to prevent accidental or intentional overwriting of data
- High-capacity, low-cost HP WORM media that can store up to 3.0 TB (2:1 compression) of data on a single data cartridge
- Support from many backup and archiving software vendors, providing the most comprehensive and mainstream support in the industry
- The LTO open standard that offers greater choice and compatibility across all third- and fourth-



Product Highlights

generation Ultrium products

NOTE: While all HP LTO-5, LTO-4, and LTO-3 Ultrium tape drives support LTO Ultrium WORM media, some LTO Ultrium tape drives from other manufacturers may not include read and write support for LTO Ultrium WORM media. For non-HP LTO Ultrium tape drives, please check the manufacturers' specifications to ensure this support is provided if you are using your WORM media. If WORM support is not provided, the drive will eject the WORM tape cartridge immediately upon insertion into the tape drive.

Included backup and recovery software

The MSL2024 and MSL4048 tape libraries include HP Data Protector Express Basic backup and recovery software. Data Protector Express Basic is based on HP Data Protector Express software. It is an easy-to-use backup and recovery application that is installed in minutes and includes all the features needed to protect a single machine by backup to a HP tape product. Data Protector Express Basic includes pre-defined and customizable media rotation schemes so you can define when you backup and how long your backups are retained, while easily managing your data cartridges. Using the included software you can easily backup a single Windows, Linux or NetWare server to a single drive MSL tape library. You can also, at no risk, evaluate, Data Protector Express as a solution for protecting multiple servers by backup to a multi-drive MSL tape library.

NOTE: Data Protector Express 5.0 Basic replaces Data Protector Express Single Server Edition as the software included with the MSL2024 and MSL4048 tape libraries tape drives. If your MSL library includes Data Protector Express Single Server Edition you should register this. At the end of the registration process you will be able to download Data Protector Express Basic.

NOTE: Data Protector Express Basic will run in evaluation mode for up to 60 days from installation. For continued use a free permanent license key is acquired by registration at: <https://webware.hp.com>. For more information see: www.hp.com/go/dataprotectorexpress/basic/register

Easy and economical upgrade of the included software to Data Protector Express

An additional benefit is a discount to the purchase of Data Protector Express. This discount is delivered using a special part number only available for customers of HP tape products. Part number TC333AAE enables Data Protector Express Basic to be upgraded to Data Protector Express for 1 Server at a significant discount to the regular buy price. Upgrading to Data Protector Express for 1 Server unlocks all the features of Data Protector Express while retaining all the jobs and settings created while using Data Protector Express Basic. Once upgraded to Data Protector Express for 1 Server, additional licenses can be purchased to protect other servers and to take advantage of the unique and all inclusive licensing of Data Protector Express.

For more information please visit: <http://www.hp.com/go/dataprotectorexpress/basic/upgrade>.

NOTE: There is no upgrade path from Data Protector Express Basic or Data Protector Express to Data Protector. If current or future requirements will require Data Protector, this software should be installed from day 1.



Product Highlights

HP Data Protector software

HP Data Protector software automates high performance backup and recovery, from disk or tape, over unlimited distances, to enable 24x7 business continuity and improve IT resource utilization. Data Protector software responds to the pressure for lower IT costs and greater operational efficiency by offering acquisition and deployment costs which are 30 - 70 % less than competition. The license model is very simple and easy to understand, helping to reduce complexity. Extensive scalability and features for continuous backup and recovery operations enable growth with a single product. A superb solution, no other software can integrate better with the HP market-leading line of disk and tape family of products, as well as with other heterogeneous storage infrastructures. As an integral component of the fast-growing HP software portfolio, which includes storage resource management, archiving, replication, and device management software, Data Protector software also fully integrates with the HP management solutions, allowing managing data protection as an essential element of an overall IT service. This solution offers the unique advantage of being able to source hardware, software, and award winning service offerings from a single, trusted source.

Data Protector software simplifies the use of complex backup and recovery procedures with the fastest installation, automated routine tasks, and easy-to-use features. The centralized multi-site management easily allows implementing multi-site changes, adapting in real time to changing business requirements. Appropriate for medium and large companies in any industry, Data Protector software is the ideal solution to reduce IT costs and complexity while remaining reliable and scalable to grow from single server environments to the largest distributed enterprise infrastructures.

If you are using HP Data Protector software with your MSL8048 or MSL8096 tape library, a FREE 61-250 slot License-to-Use entitlement certificate is included in the box.

For further information, please visit our web page at: <http://www.hp.com/go/dataprotector>

Linear Tape File System (LTFS)

HP LTFS makes tape self-describing, file-based, and easy-to-use, it also provides users with the ability to use standard file operations on tape media for accessing, managing and sharing files with an interface that behaves just like a hard disk. In addition, LTFS provides the ability to share data across platforms, as you would with a USB drive or memory stick. Simply load a tape into the drive, mount it into the file system, and it becomes visible as a disk. For more information, including user guide, downloads and compatibility, visit: <http://www.hp.com/go/ltfs>

HP StoreOpen Automation

HP StoreOpen Automation is a free downloadable application that extends the LTFS capability to HP Autoloaders, HP MSL and ESL Tape Libraries. By simply mounting the tape autoloader or library as a file system, the intuitive HP StoreOpen Automation interface makes it easier to copy, rename, create or move files. When a cartridge folder is selected for use, that tape is automatically moved to an available tape drive.

When two drives are present, HP StoreOpen Automation supports tape-to-tape operations. HP StoreOpen Automation takes advantage of other standard HP Tape Library features including data encryption and HP TapeAssure.

For more information, including user guide, downloads and compatibility, visit: <http://www.hp.com/go/HPStoreOpen>



Product Highlights

HP Library and Tape Tools

The MSL Tape Libraries are supported on HP's industry-leading diagnostic tool - HP Library and Tape Tools (L&TT). L&TT is a single, convenient program that is easy to install and simple to operate. L&TT's intuitive user interface eliminates the need for training and deploys in less than five minutes. This robust diagnostic tool is designed for both the experienced professional and the untrained administrator. It ensures product integrity through self-diagnostics and fast resolution to device concerns. Additional information on L&TT plus download information can be found at: <http://www.hp.com/support/tapetools>.

HP Storage Media

HP recommends that you use HP-branded cartridges in the MSL Tape Libraries to assure the highest level of protection for your valuable data. The test program for HP media is the most thorough and comprehensive in the industry.

All HP cartridges must satisfy an exhaustive battery of additional tests that relate directly to real life situations, where real data and real businesses are at stake. The benefit of the HP brand specification for media is consistent quality. Through the testing of thousands of HP drives and HP cartridges, the ideal formulation for backup performance is defined and then continuously monitored. This hugely resource-intensive process is unique to HP and affords deep insight into the HP+HP backup solution for a wide range of environments and duty cycles. Your best choice for ease of support and maximum dependability is to use HP-branded Ultrium cartridges at all times.

HP strongly encourages the use of bar code labels on tapes to track media and ensure optimum library performance and usability. Correctly labeling your media will allow the library to quickly determine media and drive compatibility.

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed. Customization must comply with all relevant product specifications and factory supported configurations. Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, and HP 9000 servers as well as MSA, VA7xxx, EVA, and XP disk arrays, rackable tape libraries and configurable network switches.

Type of service support varies by platform and product family. For more information on Factory Express services for your specific server model or storage device please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.



Compatibility

HP's extensive compatibility testing program assures that your HP MSL Tape Libraries work with leading servers, operating systems, and backup applications - and not just those sold by HP. The MSL libraries work seamlessly in many environments, making them especially suitable if you have a mixed system environment. For the latest list of servers, workstations, operating systems, and backup software that support the MSL tape libraries, check the HP Enterprise Backup Solution compatibility matrix at:

<http://www.hp.com/go/ebs>.

Server Compatibility

The MSL Tape Library is supported on a wide range of HP systems. For details of which MSL Libraries work with which systems, including third-party systems, reference the EBS compatibility matrix at: <http://www.hp.com/go/ebs> for the latest hardware compatibility information.

OS Support

Reference the EBS compatibility matrix for the most up-to-date OS compatibility information at: <http://www.hp.com/go/ebs>.

Software Support

Reference the EBS compatibility matrix for the most up-to-date software compatibility information at: <http://www.hp.com/go/ebs>.



Service and Support, HP Care Pack and Warranty Information

Warranty

MSL2024: The warranty for this product consists of 1-year parts exchange, next business day

MSL4048: The warranty for this product consists of 1-year parts exchange, next business day

MSL8048: The warranty for this product consists of 1-year onsite, next business day.

MSL8096: The warranty for this product consists of 1-year onsite, next business day.

NOTE: The HP MSL Tape Libraries warranty includes support for Customer Self Repair (CSR). The tape library cartridges, terminators, external cables, drives, magazines, controller board and power supplies are mandatory customer self repair parts. This means both the removal and replacement of the above parts are designed for easy replacement; the on-site warranty does not extend to these parts. However, customers may request HP Services to replace these replaceable units (RUs) for an additional charge. Also, customers who purchase an HP Support Agreement have the option to perform CSR or receive onsite support.

Please refer to HP's Limited Warranty Statement for further details:

<http://h18006.www1.hp.com/products/storageworks/warranty.html>

For increased uptime, productivity and ROI -HP Care Pack packaged services for Storage

These days, you need to get the most out of your storage investment-you can't afford not to. When you buy HP storage products and solutions, it's also a good time to think about what levels of service and support you may need. To help take the worry out of deploying, designing, maintaining, and managing your environment, we've designed a portfolio of service options that are as: flexible, reliable and scalable as your storage. Unlike storage-only vendors, we take a holistic approach to your entire environment, bridging storage, servers, blades, software and network infrastructures with our HP Care Pack packaged services for Storage.

Protect your business beyond the warranty

When it comes to robustness and reliability, standard warranties on today's computing equipment have matured just as the technologies have matured. Good news on some fronts-but also a source of potential problems and subsequent consequences that come from depending on standard warranties alone. Standard warranty protects against product defects and some causes of downtime- but not the business. By using a standard approach to warranty uplifts, such as HP Care Pack Services, you can reduce downtime risks and be more certain of operational consistency for both mission-critical and standard business computing. Simply put, HP Care Pack Services normalize the warranty of combined products - helping you proactively guard against unplanned downtime.

Extending warranties with HP Care Pack Services

For cost-effective upgrading or extending your standard warranty, HP Care Pack Services offer a suite of standard reactive hardware and software support services that are sold separately, or combined as with our Support Plus and Support Plus 24 services. The portfolio also provides a combination of proactive and reactive services, such as Proactive 24 Service and Critical Service. In addition, with HP Proactive Select we offer an innovative approach to service delivery that gives you the flexibility to acquire the specific proactive services you need today, then add services as your needs evolve. HP Proactive Select offers a broad set of technical or per-event type service options - including server, storage, and network, SAN device, and software, environment, installation and education services. Services that you can mix and match depending on your specific requirements, from preliminary planning and equipment delivery to installation, configuration, integration, and testing, through every level of ongoing support. Our HP Care Pack packaged services for Storage assures help when you need it most. And for many products, post-warranty HP Care Pack Services are available when your original warranty has expired.

HP Storage Services: Offering reliability, flexibility and value-just like your storage

HP Storage Services offers a full spectrum of customer care, from technology support to complex migrations to complete completely



Service and Support, HP Care Pack and Warranty Information

managed services. HP Factory Express provides customization, integration and deployment services for turnkey solutions. HP Education offers flexible, comprehensive training on storage networking, disk storage systems, and storage software to help your IT staff get the most out of your investments. And HP Financial solutions extend innovative financing and asset management programs to cost-effective buy, manage and eventually retire your older equipment.

HP Storage Services, the trusted business technology experts who manage your technology in action, because when technology works, business works. <http://www.hp.com/hps/storage>

NOTE: Care Pack Services availability may vary by product and country.

HP Care Pack Services are sold by HP and HP Authorized Service Partners:

- Services for customers purchasing from HP or an enterprise reseller are quoted using HP order configuration tools.
- Customers purchasing from a commercial reseller can find HP Care Pack Services at <http://www.hp.com/go/lookuptool>

Recommended Services **3-Year HP Support Plus 24**

For a higher return on your storage investment, HP Support Plus 24 provides integrated hardware and software support services designed specifically for your technology. Available 24x7, this 3-year combined reactive support option delivers onsite hardware support and over-the-phone software support around-the-clock. Leverage the full strength of HP Technology Services - customers can trust the services professionals at HP to work collaboratively with them, putting our strategic and technical know-how to work across their entire infrastructure.

- Improve uptime with responsive hardware and software services
- Enjoy consistent service coverage across geographically dispersed sites
- Update HP software at a predictable cost
- Increase customer satisfaction-with no interoperability gaps

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6638EN.pdf>

HP ESL, MSL Tape Libraries Installation and Startup

Deployment of your HP Midrange Storage Library (MSL) products in SAN environments, including the installation of a Fibre Channel Interface Controller.

- System installation and setup by an HP technical specialist
- Verification prior to installation that all service prerequisites are met
- Delivery of the service at a mutually scheduled convenient time
- Provides product installation according to the product specifications
- Offers deployment activities that are designed to bring the Fibre Channel-based tape library into operation
- Helps improve performance
- Makes the most of the value of the HP ESL, MSL, and EML libraries in an IT environment by leveraging HP knowledge in implementing Fibre Channel-based systems and solutions
- Helps reduce implementation-related disruptions in the IT environment
- Helps increase system reliability and provides more effective data management

<http://h20195.www2.hp.com/v2/GetPDF.aspx/5981-7355EN.pdf>

HP Backup and Recovery Solution Service



Service and Support, HP Care Pack and Warranty Information

Rapid recovery from system downtime can hinge on the efficiency of your backup and recovery management environment - and on how well that environment is integrated with your storage infrastructure. But integration processes can be time-consuming and complex, and your IT resources are already stretched thin. Where can you find the expert help you need?

For fast, effective integration of your backup solution into an existing or new storage infrastructure, turn to the storage experts at HP Services. Our Backup and Recovery Solution Service (BRSS) provides end-to-end management of your backup integration process. The BRSS team works with you to analyze your business and IT environment; develop a comprehensive integration plan and timetable; design an architecture that suits your critical requirements; install backup software; implement your solution; and validate your configuration.

- By engaging HP to implement HP Data Protector, customers' IT staff can stay focused on their core tasks and priorities, resulting in less impact to your business
- Professional backup and recovery planning that aligns with customer's business needs and implementation that reduces project execution time and risk to the storage environment
- HP's expertise with backup and recovery helps ensure issues are avoided

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-7442EN.pdf>

Optional Services

5-Year HP Support Plus 24

As an alternative to our recommended support level, for customers who need to improve uptime with responsive 24x7 product support:

HP Support Plus 24 helps you increase performance and availability with comprehensive, consistent hardware and software services. Working with your IT team, HP Services engineers deliver onsite hardware support and over-the-phone software support around-the-clock 365 days per year. Service coverage encompasses HP products and selected multivendor hardware and software.

In addition, this convenient HP Care Pack packaged service makes software updates available to you at substantial savings.

Choose Support Plus 24 when you need to:

- Improve uptime with responsive hardware and software services available anytime
- Cost-effectively obtain expert 24x7 multivendor hardware and software support
- Enjoy consistent service coverage across geographically dispersed sites
- Update HP and selected third-party software at a predictable cost
- Take advantage of subscription savings on software updates

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6638EN.pdf>



Service and Support, HP Care Pack and Warranty Information

eSupport

HP eSupport is a portfolio of technology-based services that assist you with managing your business environment - from the desktop to the data center.

Support Portal

The HP support portal provides one-stop access to the information, tools and services you need to manage the daily operations of your IT environment.

Features include:

- Access to self-solve tools (including search technical knowledge base)
- Efficient logging and tracking of support cases
- Collaboration with other business and IT professionals
- Download of patches and drivers
- Access to diagnostic tools
- Proactive notification of relevant information

Access to certain features of the support portal requires an HP service agreement. To access the support portal, visit: <http://www.hp.com/support>

Customer Technical Training

Consider education as an integral part of your strategy to get the best return on investment for your HP storage solution. HP offers a variety of training courses on storage software, networking, archiving and disk storage systems. Our classes are available in many delivery modalities from traditional instructor-led courses at one of our 80 training centers worldwide to on-site training customized to your needs or online. www.hp.com/learn/storage

HP Services Awards

HP Services continues to be recognized for service and support excellence by customers, partners, industry organizations and publications around the world. Recent honors and award reflect our services team's dedications, technical expertise, professionalism and uncompromising commitment to customer satisfaction. For a list of all our awards, please visit:

<http://h20219.www2.hp.com/services/cache/433028-0-0-225-121.htm>

Additional Services Information

For more information about HP Care Pack Services for Storage, please visit:

<http://www.hp.com/hps/storage>

If you have specific questions, contact your local HP representative. Contact information for a representative in your area can be found at "Contact HP" <http://www.hp.com>



Configuration Information

Step 1 - Base Configuration

HP MSL2024 Tape Library MSL2024 Model Description

	Part Number
HP MSL2024 1 LTO-5 Ultrium 3280 FC Tape Library	BL531A
HP MSL2024 1 LTO-5 Ultrium 3000 SAS Tape Library	BL537A
HP MSL2024 1 LTO-5 Ultrium 3000 FC Tape Library	BL542A
HP MSL2024 1 LTO-4 Ultrium 1840 FC Tape Library	AJ034A
HP MSL2024 1 LTO-4 Ultrium 1840 SCSI Tape Library	AJ033A
HP MSL2024 1 LTO-4 Ultrium 1760 SAS Tape Library	AK378A
HP MSL2024 1 LTO-4 Ultrium 1760 SCSI Tape Library	AJ817A
HP MSL2024 1 LTO-3 Ultrium 920 SAS Tape Library	AH559A
HP MSL2024 1 LTO-3 Ultrium 920 SCSI Tape Library	AH169A
HP MSL2024 0-drive, 24 Slot Tape Library	AK379A

NOTE: The HP MSL2024 Tape Library comes standard with either one or two drives and a 24-slot library which is shipped rack-ready; a racking kit is included in the box. The HP MSL2024 Tape Libraries no longer ship standard US Power Cord (C13, 10A, 1.83m, P/N AF556A) that allow connection to 110V US wall outlets in a home or office. HP MSL2024 Tape Libraries are primarily connected to PDU's in data center racks so they now ship with only a PDU power cord (C13/C14, 10A, P/N 142257-002). If a user wishes to power a HP MSL2024 Tape Library using a 110V receptacle the US Power Cord (P/N AF556A) must be ordered separately. If customers require a power cord, they can check the power cord matrix for the appropriate cord. Please see the UPS and PDU cable matrix's on the Power Protection page under Power Cords that lists cable descriptions, requirements, and specifications for UPS and PDU units at the new HP Power Cord Link @ HP.com. Use the following new link:

www.hp.com/products/powercords

Kit Contents (for each library):

- **Zero-drive Model:**
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One RJ-45 Ethernet cable
 - Rack-mount hardware
- **SCSI Models:**
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One 6 ft VHDCI to HDTS68 SCSI cable per tape drive
 - One HDTS68 SCSI terminator per SCSI tape drive
 - One RJ-45 Ethernet cable
 - Rack-mount hardware
 - HP Data Protector Express Basic backup and recovery software for Windows/Linux/NetWare
- **SAS Model:**
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One RJ-45 Ethernet cable
 - Rack-mount hardware
 - HP Data Protector Express Basic backup and recovery software for Windows/Linux/NetWareFibre
- **Fibre Channel Models:**
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One RJ-45 Ethernet cable
 - Rack-mount hardware



Configuration Information

- HP Data Protector Express Basic backup and recovery software for Windows/Linux/NetWare

HP MSL4048 Tape Library	MSL4048 Model Description	Part Number
	HP MSL4048 1 LTO-5 Ultrium 3280 FC Tape Library	BL532A
	HP MSL4048 2 LTO-5 Ultrium 3000 SAS Tape Library	BL538A
	HP MSL4048 2 LTO-5 Ultrium 3000 FC Tape Library	BL543A
	HP MSL4048 1 LTO-4 Ultrium 1840 FC Tape Library	AJ036A
	HP MSL4048 2 LTO-4 Ultrium 1840 FC Tape Library	AJ038A
	HP MSL4048 2 LTO-4 Ultrium 1840 SCSI Tape Library	AJ037A
	HP MSL4048 2 LTO-4 Ultrium 1760 SCSI Tape Library	AJ818A
	HP MSL4048 2 LTO-4 Ultrium 1760 SAS Tape Library	AK380A
	HP MSL4048 1 LTO-3 Ultrium 920 SCSI Tape Library	AH171A
	HP MSL4048 0-Drive, 48 Slot Tape Library	AK381A

NOTE: The HP MSL4048 Tape Library comes standard with either one or two drives, and a 48-slot library which is shipped rack-ready; a racking kit is included in the box. The HP MSL4048 Tape Libraries no longer ship standard US Power Cord (C13, 10A, 1.83m, P/N AF556A) that allow connection to 110V US wall outlets in a home or office. HP MSL4048 Tape Libraries are primarily connected to PDU's in data center racks so they now ship with only a PDU power cord (C13/C14, 10A, P/N 142257-002). If a user wishes to power a HP MSL4048 Tape Library using a 110V receptacle the US Power Cord (P/N AF556A) must be ordered separately. If customers require a power cord, they can check the power cord matrix for the appropriate cord. Please see the UPS and PDU cable matrix's on the Power Protection page under Power Cords that lists cable descriptions, requirements, and specifications for UPS and PDU units at the new HP Power Cord Link @ HP.com. Use the following new link:

www.hp.com/products/powercords

Kit Contents (for each library):

- **Zero-drive Model:**
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One RJ-45 Ethernet cable
 - Rack-mount hardware
- **SCSI Models:**
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One 6 ft VHDCI to HDTS68 SCSI cable per SCSI tape drive
 - One HDTS68 SCSI terminator per SCSI tape drive
 - One RJ-45 Ethernet cable
 - Rack-mount hardware
 - HP Data Protector Express Basic backup and recovery software for Windows/Linux/NetWareSAS
- **SAS Model:**
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One RJ-45 Ethernet cable
 - Rack-mount hardware
 - HP Data Protector Express Basic backup and recovery software for Windows/Linux/NetWare
- **Fibre Channel Models:**
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One RJ-45 Ethernet cable
 - Rack-mount hardware



Configuration Information

- HP Data Protector Express Basic backup and recovery software for Windows/Linux/NetWare

HP MSL8048 Tape Library MSL8048 Model Description

Part Number
AU300A

HP MSL8048 0-Drive, 48 Slot Tape Library

NOTE: The HP MSL8048 Tape Library comes with zero drives, and 48 of the 96 physical slot enabled for use. To upgrade from 48 to 96 slots, the 48 to 96 slot upgrade license must be purchased (TA739A). Drive kits must be ordered separately

NOTE: The MSL8048 is shipped rack-ready; a racking kit is included in the box. The HP MSL8048 Tape Libraries no longer ship standard US Power Cord (C13, 10A, 1.83m, P/N AF556A) that allow connection to 110V US wall outlets in a home or office. HP MSL8048 Tape Libraries are primarily connected to PDU's in data center racks so they now ship with only a PDU power cord (C13/C14, 10A, P/N 142257-002). If a user wishes to power a HP MSL8048 Tape Library using a 110V receptacle the US Power Cord (P/N AF556A) must be ordered separately. If customers require a power cord, they can check the power cord matrix for the appropriate cord. Please see the UPS and PDU cable matrix's on the Power Protection page under Power Cords that lists cable descriptions, requirements, and specifications for UPS and PDU units at the new HP Power Cord Link @ HP.com. Use the following new link:

www.hp.com/products/powercords

HP MSL8048 48 to 96 slot license

TA739A

NOTE: For use with MSL8048 to upgrade from 48 to 96 slots using a license key. All 96 slots must be enabled prior to using the MSL Library Extender Kit.

MSL8048 Kit Contents:

- **Zero-drive Model:**
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One RJ-45 Ethernet cable
 - Rack-mount hardware
 - HP Data Protector software 61-250 slot License-to-Use entitlement certificate. Warranty for 61-250 slot LTU will need to be purchased separately

HP MSL8096 Tape Library MSL8096 Model Description

Part Number

HP MSL8096 2 LTO-5 Ultrium 3280 FC Tape Library

BL533A

HP MSL8096 4 LTO-5 Ultrium 3280 FC Tape Library

BL534A

HP MSL8096 2 LTO-5 Ultrium 3000 SAS Tape Library

BL539A

HP MSL8096 2 LTO-4 Ultrium 1840 FC Tape Library

AJ040A

HP MSL8096 4 LTO-4 Ultrium 1840 FC Tape Library

AN974A

HP MSL8096 2 LTO-4 Ultrium 1760 SAS Tape Library

AK382A

HP MSL8096 4 LTO-3 Ultrium 960 FC Tape Library

AN973A

NOTE: The HP MSL8096 Tape Library comes standard with either two or four drives, and a 96-slot library which is shipped rack-ready; a racking kit is included in the box. The HP MSL8096 Tape Libraries no longer ship standard US Power Cord (C13, 10A, 1.83m, P/N AF556A) that allow connection to 110V US wall outlets in a home or office. HP MSL8096 Tape Libraries are primarily connected to PDU's in data center racks so they now ship with only a PDU power cord (C13/C14, 10A, P/N 142257-002). If a user wishes to power a HP MSL8096 Tape Library using a 110V receptacle the US Power Cord (P/N AF556A) must be ordered separately. If customers require a power cord, they can check the power cord matrix for the appropriate cord. Please see the UPS and PDU cable matrix's on the Power Protection page under Power Cords that lists cable descriptions, requirements, and specifications for UPS and PDU units at the



Configuration Information

new HP Power Cord Link @ HP.com. Use the following new link:
www.hp.com/products/powercords

Kit Contents (for each library):

- **SCSI Models:**
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One 6 ft VHDCI to HDTS68 SCSI cable per SCSI tape drive
 - One HDTS68 SCSI terminator per SCSI tape drive
 - One RJ-45 Ethernet cable
 - Rack-mount hardware
 - HP Data Protector software 61-250 slot License-to-Use entitlement certificate. Warranty for 61-250 slot LTU will need to be purchased separately
- **SAS Model:**
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One RJ-45 Ethernet cable
 - Rack-mount hardware
 - HP Data Protector software 61-250 slot License-to-Use entitlement certificate. Warranty for 61-250 slot LTU will need to be purchased separately
- **Fibre Channel Models:**
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One RJ-45 Ethernet cable
 - Rack-mount hardware
 - HP Data Protector software 61-250 slot License-to-Use entitlement certificate. Warranty for 61-250 slot LTU will need to be purchased separately

Step 2 - Additional Options

Select each option as required with quantities specified:

Quantity	Description	Part Number
1 each	Power Cord, C13, 10A, 1.83m NOTE: This cord does not ship standard with MSL Tape Library.	AF556A
1 each	PDU Power Cord, C13/C14, 10A, 2.5m NOTE: This cord ships standard with each MSL Tape Library; can be used to connect the rack-mounted device to PDUs with IEC-320 receptacles.	142257-002

WARNING: This product can ONLY be used with an HP approved power cord for your specific geographic region. Use of a non-HP approved power cord may result in: 1) not meeting individual country specific safety requirements; 2) insufficient conductor amperage that could result in overheating with potential personal injury and/or property damage; and 3) an unapproved power cord could fracture resulting in the internal contacts being exposed, which potentially could subject the user to a shock hazard. HP disclaims all liability in the event a non-HP approved power cord is used.

Regional Power Cords	Quantity	Description	Part Number
	1 each	Power Cord, Euro, C13, 10A, 1.83m	AF568A
	1 each	Power Cord, UK, C13, 10A, 1.83m	AF570A
	1 each	Power Cord, Danish, C13, 10A, 1.83m	AF566A
	1 each	Power Cord, Swiss, C13, 10A, 1.83m	AF565A
	1 each	Power Cord, Italian, C13, 10A, 1.83m	AF571A



Configuration Information

1 each	Power Cord, South Africa, C13, 10A, 2.5m	AF567A
1 each	Power Cord, Taiwan, C13, 12A, 1.83m	AF561A
1 each	Power Cord, China, C13, 10A, 1.83m	AF557A
1 each	Power Cord, Japan, C13, 12A, 2.0m	AF572A
1 each	Power Cord, Australia, C13, 10A, 2.5m	AF569A
1 each	Power Cord, Argentina, C13, 10A, 2.5m	AF558A
1 each	Power Cord, Brazil, C13, 10A, 1.83m	AF559A
1 each	Power Cord, Korea, C13, 10A, 1.83m	AF560A
1 each	Power Cord, Israel, C13, 10A, 1.83m	AF564A
1 each	Power Cord, India, C13, 10A, 2.0m	AF562A

NOTE: One power cord is required; please select the correct power cord for your geographical location.

WARNING: This product can ONLY be used with an HP approved power cord for your specific geographic region. Use of a non-HP approved power cord may result in: 1) not meeting individual country specific safety requirements; 2) insufficient conductor ampacity that could result in overheating with potential personal injury and/or property damage; and 3) an unapproved power cord could fracture resulting in the internal contacts being exposed, which potentially could subject the user to a shock hazard. HP disclaims all liability in the event a non-HP approved power cord is used.



Related Options

Factory Racking	<p>Factory integrate the MSL Tape Libraries with other HP products such as HP ProLiant Servers.</p> <p>NOTE: #0D1 will appear after the Tape Library part number on the sales order if HP factory integration is indicated.</p>	#0D1
Tape Drives	<p>HP MSL LTO-5 Ultrium 3280 FC Drive Upgrade Kit</p> <p>NOTE: For use with the MSL 2024, 4048, 8048, or 8096 libraries. Drive kit includes a tape drive and documentation.</p>	BL535A
	<p>HP MSL LTO-5 Ultrium 3000 FC Drive Upgrade Kit</p> <p>NOTE: For use with the MSL 2024, 4048, 8048, or 8096 libraries. Drive kit includes a tape drive and documentation.</p>	BL544A
	<p>HP MSL LTO-5 Ultrium 3000 SAS Drive Upgrade Kit</p> <p>NOTE: For use with the MSL 2024, 4048, 8048, or 8096 libraries. Drive kit includes a tape drive and documentation.</p>	BL540A
	<p>HP MSL LTO-4 Ultrium 1840 4Gb FC Drive Upgrade Kit</p> <p>NOTE: For use with the MSL 2024, 4048, 8048, or 8096 libraries. Drive kit includes a tape drive and documentation.</p>	AJ042A
	<p>HP MSL LTO-4 Ultrium 1840 SAS Drive Upgrade Kit</p> <p>NOTE: For use with the MSL 2024, 4048, 8048, or 8096 libraries. Drive kit includes a tape drive and documentation.</p>	AJ041A
	<p>HP MSL LTO-4 Ultrium 1760 SAS Drive Upgrade Kit</p> <p>NOTE: For use with the MSL 2024, 4048, 8048, or 8096 libraries. Drive kit includes a tape drive and documentation.</p>	AK383A
	<p>HP MSL LTO-4 Ultrium 1760 SCSI Drive Upgrade Kit</p> <p>NOTE: For use with the MSL 2024, 4048, 8048, or 8096 libraries. Drive kit includes a tape drive and documentation.</p>	AJ819A
	<p>HP MSL LTO-3 Ultrium 960 FC 4Gb Drive Upgrade Kit</p> <p>NOTE: For use with the MSL 2024, 4048, 8048, or 8096 libraries. Drive kit includes a tape drive and documentation.</p>	AG328B
	<p>HP MSL LTO-3 Ultrium 960 SCSI Drive Upgrade Kit</p> <p>NOTE: For use with the MSL 2024, 4048, 8048, or 8096 libraries. Drive kit includes a tape drive and documentation.</p>	AG327A
	<p>HP MSL LTO-3 Ultrium 920 SCSI Drive Upgrade Kit</p> <p>NOTE: For use with the MSL 2024, 4048, 8048, or 8096 libraries. Drive kit includes a tape drive and documentation.</p>	AH173A
	<p>HP MSL LTO-3 Ultrium 920 SAS Drive Upgrade Kit</p> <p>NOTE: For use with the MSL 2024, 4048, 8048, or 8096 libraries. Drive kit includes a tape drive and documentation.</p>	AH562A



Related Options

Magazine Kits	HP MSL 2024 Ultrium Left Magazine Kit NOTE: For use in the MSL 2024tape Libraries in either the upper or lower left position. User-enabled mail slots can be configured at either 0 or 3 slots.	AG119A
	HP MSL Ultrium Left Magazine Kit NOTE: For use in the MSL 4048, 8048, or 8096 tape Libraries in either the upper or lower left position. When used in the lower left position, user-enabled mail slots can be configured at either 0 or 3 slots.	AG330A
	HP MSL Ultrium Right Magazine Kit NOTE: For use only on the right side of the MSL 2024, 4048, 8048, or 8096 Tape Libraries; additional 12-slot magazine for either the right upper or lower position.	AG120A

Redundant Power Supply Upgrade Kit	HP MSL Redundant Power Supply Upgrade Kit NOTE: For use in the MSL4048, 8048 or 8096 Tape Libraries to add a second customer-installable power supply into the unitHP MSL Redundant Power Supply Upgrade Kit no longer ship standard US Power Cord (C13, 10A, 1.83m, P/N AF556A) that allow connection to 110V US wall outlets in a home or office. HP MSL Redundant Power Supply is primarily connected to PDU's in data center racks so it now ship with only a PDU power cord (C13/C14, 10A, P/N 142257-002). If a user wishes to connect to HP MSL Redundant Power Supply to 110V US wall outlet power then the US Power Cord (P/N AF556A) must be ordered separately. If customers require a power cord, they can check the power cord matrix for the appropriate cord. Please see the UPS and PDU cable matrix's on the Power Protection page under Power Cords that lists cable descriptions, requirements, and specifications for UPS and PDU units at the new HP Power Cord Link @ HP.com. Use the following new link: www.hp.com/products/powercords	AH220A
------------------------------------	--	--------

Slot License Upgrade	HP MSL8048 48 to 96 slot license NOTE: For use with MSL8048 to upgrade from 48 to 96 slots using a license key. All 96 slots must be enabled prior to using the MSL Library Extender Kit.	TA739A
----------------------	---	--------

Encryption	HP 1/8 G2 & MSL Tape Library Encryption Kit NOTE: For use with new or installed LTO-5 or LTO-4 MSL2024/4048/8048/8096 Tape Libraries. The Encryption Kit key server token will generate and retain encryption keys for HP LTO-5 or LTO- 4 Ultrium tape drives in the library. Does not require support from ISV.	AM495A
------------	--	--------

Library Extender	HP MSL Library Extender Kit NOTE: For use with the MSL2024, 4048 or 8096 libraries to physically connect two libraries together creating one larger logical library. Supported configurations can be found in the Library Extender section of this QuickSpec. Library Extender is installed into a drive bay of each library and should take about 60 minutes for installation and configuration. Configurations that are NOT supported include two MSL2024s or two MSL8096s. NOTE: An MSL8048 must have all 96 slots enabled prior to using the MSL Library Extender Kit.	AQ746A
------------------	--	--------



Related Options

Table Top Conversion Kits	HP MSL2024 Rack to Tabletop Conversion Kit	AG121A
	HP MSL4048 Rack to Tabletop Conversion Kit	AG329A
SAS Host Bus Adapters	HP SC44Ge SAS Host Bus Adapter NOTE: Serial-attached SCSI (SAS) HBA that enables HP MSL Tape Libraries to connect with HP ProLiant G5 servers. PCI-Express SAS HBA with one external SFF8470 port.	416096-B21
	HP P212 Smart Array Controller Zero Memory NOTE: Recommended for ProLiant G6 SAS tape automation connect. 256MB or larger write cache recommended for more than two tape drives.	462828-B21
	HP P212 Smart Array Controller: 256MB Memory NOTE: Recommended for ProLiant G6 SAS tape automation connect.	462834-B21
	HP P411 Smart Array Controller 256MB NOTE: Recommended for ProLiant G6 SAS tape automation connect.	462830-B21
	HP P411 Smart Array Controller 512MB NOTE: Recommended for ProLiant G6 SAS tape automation connect.	462832-B21
	HP P711m Smart Array Controller 1G FBWC NOTE: Recommended for C series blade enclosure tape automation connect.	513778-B21
	HP P712m Smart Array Controller 256MB NOTE: Recommended for C series blade enclosure tape automation connect.	488348-B21
	HP P700m Smart Array Controller 256MB NOTE: Recommended for C series blade enclosure tape automation connect.	507925-B21
	HP P700m Smart Array Controller 512MB NOTE: Recommended for C series blade enclosure tape automation connect.	508226-B21
	SCSI Host Bus Adapters	HP SC11Xe SCSI Host Bus Adapter NOTE: Single channel PCI-Express (PCI-e) SCSI Ultra 320 HBA that enables HP MSL Tape Libraries to connect to HP ProLiant servers.
HP U320e SCSI Host Bus Adapter NOTE: Dual channel PCI-Express (PCI-e) SCSI Ultra320 HBA that enables HP MSL Tape Libraries to connect with HP ProLiant servers.		AH627A
Reference the EBS compatibility matrix for the most up-to-date HBA compatibility information at: http://www.hp.com/go/ebs .		
Optical cables	PremierFlex OM3+ LC/LC type cables	
	0.5m PremierFlex LC/LC Multi-Mode Optical Cable	BK837A
	1m PremierFlex LC/LC Multi-Mode Optical Cable	BK838A
	2m PremierFlex LC/LC Multi-Mode Optical Cable	BK839A
	5m PremierFlex LC/LC Multi-Mode Optical Cable	BK840A
	15m PremierFlex LC/LC Multi-Mode Optical Cable	BK841A
	30m PremierFlex LC/LC Multi-Mode Optical Cable	BK842A
	50m PremierFlex LC/LC Multi-Mode Optical Cable	BK843A
	OM3 LC-LC type cables	
	0.5Multi-mode OM3 LC/LC FC Cable	AJ833A
1m Multi-mode OM3 LC/LC FC Cable	AJ834A	



Related Options

2m Multi-mode OM3 LC/LC FC Cable	AJ835A
5m Multi-mode OM3 LC/LC FC Cable	AJ836A
15m Multi-mode OM3 LC/LC FC Cable	AJ837A
30m Multi-mode OM3 LC/LC FC Cable	AJ838A
50m Multi-mode OM3 LC/LC FC Cable	AJ839A

OM2 LC-LC type cables

2m SW LC/SC FC Cable Kit	221691-B21
5m SW LC/SC FC Cable Kit	221691-B22
15m SW LC/SC FC Cable Kit	221691-B23
2m SW LC/LC FC Cable Kit	221692-B21
15m SW LC/LC FC Cable Kit	221692-B23

Allowed cable lengths:

	2Gb	4Gb	8Gb
OM2	0.5m - 300m	0.5m - 150m	0.5m - 50m
OM3	0.5m - 500m	0.5m - 380m	0.5m - 150m
OM4	N/A	0.5m - 400m	0.5m - 190m

NOTE: The HP MSL LTO-5 Ultrium 3000 Drive contains an internal OM2 optical cable and limits the maximum allowed cable lengths to those as specified for OM2. The lowest OM rating in a path from the drive to the switch or HBA will dictate the maximum length of the connection path.

Cable Kits (SCSI, SAS)

6 ft VHDCI/HDT568 SCSI Cable Kit	341176-B21
12 ft VHDCI/HDT568 SCSI Cable Kit	341177-B21
2m External Infiniband (SFF8470) to 4 Mini SAS (SFF8088) 1x SAS Cable Kit	AH587A
NOTE: One cable is required for every four drives. Use this cable to connect HP MSL SAS Tape Libraries to HP SAS controllers with Infiniband (SFF8470) connectors.	
2m External mini-SAS to 4x1 mini-SAS Cable Kit	AN975A
NOTE: One cable is required for every four drives. Use this cable to connect HP MSL SAS Tape Libraries to Mini-SAS (SFF8088) ports.	
4m External mini-SAS to 4x1 mini-SAS Cable Kit	AN976A
NOTE: One cable is required for every four drives. Use this cable to connect HP MSL SAS Tape Libraries to Mini-SAS (SFF8088) ports.	
2m SFF8088-to-SFF8088 1x SAS Cable Kit	AE470A
NOTE: One SAS tape drive only. Use this cable to connect HP SAS external tape devices to HP SAS controllers with external Mini-SAS (SFF8088) connectors.	
4m SFF8088-to-SFF8088 1x SAS Cable Kit	AE465A
NOTE: One SAS tape drive only. Use this cable to connect HP SAS external tape devices to HP SAS controllers with external Mini-SAS (SFF8088) connectors.	

Controller/HBA & Cable Recommendation Matrix	Recommended HBA/ Controller for tape automation	HBA/ Controller Product Number	Recommended Cables	Cable Product Number
SAS	HP SC44Ge SAS Host Bus	416096-B21	2m SFF8470-to-4 SFF8088 1x	AH587A



Related Options

Adapter

NOTE: Recommended for Proliant G5 SAS tape automation connect.

HP P212 Smart Array Controller Zero Memory 462828-B21

NOTE: Recommended for Proliant G6 SAS tape automation connect. 256MB or larger write cache recommended for more than two tape drives.

HP P212 Smart Array Controller 256MB Memory 462834-B21

NOTE: Recommended for Proliant G6 SAS tape automation connect.

HP P411 Smart Array Controller 256MB 462830-B21

NOTE: Recommended for Proliant G6 SAS tape automation connect.

HP P411 Smart Array Controller 512MB 462832-B21

NOTE: Recommended for Proliant G6 SAS tape automation connect.

HP P711m Smart Array Controller 1G FBWC 513778-B21

NOTE: Recommended for C series blade enclosure tape automation connect.

HP P712m Smart Array Controller 256MB 488348-B21

NOTE: Recommended for C series blade enclosure tape automation connect.

HP P700m Smart Array Controller 256MB 507925-B21

NOTE: Recommended for C series blade enclosure tape automation connect.

HP P700m Smart Array Controller 512MB 508226-B21

NOTE: Recommended for C series blade enclosure tape automation connect.

SCSI

HP SC11Xe SCSI Host Bus Adapter 412911-B21

NOTE: Recommended for Proliant G6 SAS tape automation connect.

SAS Cable Kit

For one tape drive:

- **AE470A** -- 2m SFF8088-to-SFF8088 1x SAS Cable Kit
NOTE: one SAS tape drive only.
- **AE465A** -- 4m SFF8088-to-SFF8088 1x SAS Cable Kit
NOTE: one SAS tape drive only.

For two or more tape drives:

- **AN975A** -- 2m SFF8088-to-4 SFF8088 1x SAS Cable Kit
NOTE: One cable is required for every four drives.
- **AN976A** -- 4m SFF8088-to-4 SFF8088 1x SAS Cable Kit
NOTE: One cable is required for every four drives.

6 ft VHDCI/HDTS68 SCSI Cable Kit 341176-B21



Related Options

NOTE: Single channel PCI-Express (PCI-e) SCSI Ultra 320 HBA.		12 ft VHDCI/HDT568 SCSI Cable Kit	341177-B21
HP U320e SCSI Host Bus Adapter	AH627A	6 ft VHDCI/HDT568 SCSI Cable Kit	341176-B21
NOTE: Dual channel PCI-Express (PCI-e) SCSI Ultra 320 HBA.		12 ft VHDCI/HDT568 SCSI Cable Kit	341177-B21

Controller information (both SAS and SCSI) are located in two locations:
 Smart Array: <http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/index.html>
 HBA: <http://h18004.www1.hp.com/products/servers/proliantstorage/adapters/index.html>

Reference the EBS compatibility matrix for the most up-to-date HBA compatibility information at:
<http://www.hp.com/go/ebs>

PCI Expansion Blade	HP PCI Expansion Blade	448018-B21
	NOTE: Ships with one pre-installed PCI-X connect board. Also includes one PCIe connect board which requires installation.	
	HP BladeSystem c-Class customers who have a c3000 or c7000 blade enclosure but don't have fibre infrastructure have the option to connect an MSL SAS Tape Library to the enclosure utilizing a PCI Expansion Blade. Configuration requires an HP SC44Ge HBA (416096-B21) installed inside the PCI Expansion Blade which resides next to the partner server blade (backup server) in the blade enclosure. Please visit the "SAS HBAs" section of the Enterprise Backup Solution (EBS) compatibility matrix at: www.hp.com/go/ebs for further compatibility details. Please visit: www.hp.com/go/blades for further details about the HP PCI Expansion Blade.	341177-B21

Rack Cabinets	10622 (22U) Universal Rack Cabinet - Shock Pallet	AF022A
	10636 (36U) Universal Rack Cabinet - Shock Pallet	AF012A
	10636 (36U) Universal Rack Cabinet with extension - Shock Pallet	AF014A
	10642 (42U) Universal Rack Cabinet - Shock Pallet	AF002A
	10642 (42U) Universal Rack Cabinet with extension - Shock Pallet	AF004A
	NOTE: The MSL Tape Libraries are certified to ship in HP 10000 series racks which include a shock pallet. It is mandatory to use a shock pallet in order to ship racks with equipment installed.	
	NOTE: This rack ships unassembled and boxed on a standard size pallet. It is an industry standard 19" wide rack with side panels and rear doors; it does not ship with the front door or casters.	
	NOTE:	



Related Options

Media	HP LTO-5 Ultrium 3TB RW Data Cartridge (1 pack)	C7975A
	HP LTO-5 Ultrium 3TB WORM Data Cartridge (1 pack)	C7975W
	HP LTO-4 Ultrium 1.6TB RW Data Cartridge (1 pack)	C7974A
	HP LTO-4 Ultrium 1.6TB WORM Data Cartridge (1 pack)	C7974W
	HP LTO-3 Ultrium 800GB RW Data Cartridge (1 pack)	C7973A
	HP LTO-3 Ultrium 800GB WORM Data Cartridge (1 pack)	C7973W
	HP LTO-2 Ultrium 400GB data cartridge (1 pack)	C7972A
	HP Ultrium Universal Cleaning Cartridge (1 pack)	C7978A
	Bar Code Labels	
	HP LTO-5 Ultrium RW Bar Code Labels (100 pack)	Q2011A
	HP LTO-5 Ultrium WORM Bar Code Labels (100 pack)	Q2012A
	HP LTO-4 Ultrium RW Bar Code Labels (100 pack)	Q2009A
	HP LTO-4 Ultrium WORM Bar Code Labels (100 pack)	Q2010A
	HP LTO-3 Ultrium 3 RW Bar Code Labels (100 pack)	Q2007A
	HP LTO-3 Ultrium 3 WORM Bar Code Labels (100 pack)	Q2008A
	HP LTO-2 Ultrium 2 Bar Code Labels (100 pack)	Q2002A
	Non-Custom Labeled Data Cartridges	
	NOTE: Non-Custom labels will come pre-labeled with a pre-determined number sequence.	
	HP LTO-5 Ultrium 3.0TB Non-Custom Labeled Data Cartridge (20 pack)	C7975AN
	HP LTO-4 Ultrium 1.6TB Non-Custom Labeled Data Cartridge (20 pack)	C7974AN
	HP LTO-3 Ultrium 800GB Non-Custom Labeled Data Cartridge (20 pack)	C7973AN
	HP LTO-2 Ultrium 400GB Non-Custom Labeled Data Cartridge (20 pack)	C7972AN
	HP LTO-1 Ultrium 200GB Non-Custom Labeled Data Cartridge (20 pack)	C7971AN
	Custom Labeled Data Cartridges	
	NOTE: Custom labeled products allow customers to customize a specific sequence printed on each label.	
	HP LTO-5 Ultrium 3.0TB RW Custom Labeled Data Cartridge (20 pack)	C7975AL
	HP LTO-5 Ultrium 3.0TB RW Eco Pack (no case) Data Cartridge (20 pack)	C7975AC
	HP LTO-5 Ultrium 3.0TB WORM Custom Labeled Data Cartridge (20 pack)	C7975WL
	HP LTO-4 Ultrium 1.6TB RW Custom Labeled Data Cartridge (20 pack)	C7974AL
	HP LTO-4 Ultrium 1.6TB WORM Custom Labeled Data Cartridge (20 pack)	C7974WL
	HP LTO-3 Ultrium 800GB RW Custom Labeled Data Cartridge (20 pack)	C7973AL
	HP LTO-3 Ultrium 800GB WORM Custom Labeled Data Cartridge (20 pack)	C7973WL
	HP LTO-2 Ultrium 400GB Custom Labeled Data Cartridge (20 pack)	C7972AL
	HP LTO-2 Ultrium 200GB Custom Labeled Data Cartridge (20 pack)	C7971AL

Upgrade included software to Data Protector Express	Upgrade to HP Data Protector Express for 1 Server from HP Data Protector Express Basic	eDelivery media kit	TC333AAE TC333A
--	--	---------------------	--------------------



Related Options

HP Care Pack Options

Same Day Response

Warranty upgrade to 1-year, 13x5, 4 hour response/onsite, electronic	UF835E
Warranty upgrade to 1-year, 24x7, 4 hour response/onsite, electronic	UF836E
Warranty upgrade to 1-year, 24x7, call-to-repair, 6 hour response/onsite, electronic	UF837E
Warranty upgrade to 3-year, 13x5, 4 hour response/onsite, electronic	UF839E
Warranty upgrade to 3-year, 24x7, 4 hour response/onsite, electronic	UF840E
Warranty upgrade to 3-year, 24x7, call-to-repair, 6 hour response/onsite, electronic	UF841E
Warranty upgrade to 4-year, 13x5, 4 hour response/onsite, electronic	UF842E
Warranty upgrade to 4-year, 24x7, 4 hour response/onsite, electronic	UF843E
Warranty upgrade to 5-year, 13x5, 4 hour response/onsite, electronic	UF844E
Warranty upgrade to 5-year, 24x7, 4 hour response/onsite, electronic	UF845E

Next Business Day Response

Warranty upgrade to 3-year next business day/onsite, electronic	UF838E
---	--------

Hardware Services

Installation services, electronic	U4824E
SAN installation & startup service, electronic	UA872E

NOTE: In order to maximize ROI and product uptime, and minimize the cost of ownership, Hewlett-Packard recommends the 3-year, 24 x 7 service options. These offerings will ensure that any product issue can be tackled when they occur (most back up issues will occur outside standard business hours) and that the service coverage regarding period, covers the minimum expected life of the host system.



Technical Specifications

		MSL2024	MSL4048	MSL8048/8096
Drive Technology		LTO-5 Ultrium 3280 LTO-5 Ultrium 3000 LTO-4 Ultrium 1840 LTO-4 Ultrium 1760 LTO-3 Ultrium 960 LTO-3 Ultrium 920	LTO-5 Ultrium 3280 LTO-5 Ultrium 3000 LTO-4 Ultrium 1840 LTO-4 Ultrium 1760 LTO-3 Ultrium 960 LTO-3 Ultrium 920	LTO-5 Ultrium 3280 LTO-5 Ultrium 3000 LTO-4 Ultrium 1840 LTO-4 Ultrium 1760 LTO-3 Ultrium 960
Maximum Number of Drives		1 (Ultrium 3280, 1840, 960) 2 (Ultrium 3000, 1760, 920)	2 (Ultrium 3280, 1840, 960) 4 (Ultrium 3000, 1760, 920)	4 (Ultrium 3280, 3000, 1840, 1760, 960)
Number of Slots		24	48	48 (MSL8048) 96 (MSL8096)
Drive Interface		8 Gb Native Fibre Channel 4 Gb Native Fibre Channel 6 Gb/sec SAS 3 Gb/sec SAS Ultra320 LVD SCSI	8 Gb Native Fibre Channel 4 Gb Native Fibre Channel 6 Gb/sec SAS 3 Gb/sec SAS Ultra320 LVD SCSI	8 Gb Native Fibre Channel 4 Gb Native Fibre Channel 6 Gb/sec SAS 3 Gb/sec SAS Ultra320 LVD SCSI
Maximum Capacity	Native	36 TB (LTO-5) 19.2 TB (LTO-4) 9.6 TB (LTO-3)	72 TB (LTO-5) 38.4 TB (LTO-4) 19.2 TB (LTO-3)	72 TB (LTO-5, 48 slots) 144 TB (LTO-5, 96 slots) 38.4 TB (LTO-4, 48 slots) 19.2 TB (LTO-3, 48 slots) 76.8 TB (LTO-4, 96 slots) 38.4 TB (LTO-3, 96 slots)
	Compressed (2:1)	72 TB (LTO-5) 38.4 TB (LTO-4) 19.2 TB (LTO-3)	144 TB (LTO-5) 76.8 TB (LTO-4) 38.4 TB (LTO-3)	288 TB (LTO-5, 96 slots) 153.6 TB (LTO-4, 96 slots) 76.8 TB (LTO-3, 96 slots) 144 TB (LTO-5, 48 slots) 76.8 TB (LTO-4, 48 slots) 38.4 TB (LTO-3, 48 slots)
Maximum Transfer Rate	Native	504 GB/hr (one 3280/3000) 432 GB/hr (one 1840) 288 GB/hr (one 1760) 288 GB/hr (one 960) 432 GB/hr (two 920)	504 GB/hr (one 3280/3000) 1.0 TB/hr (two 3000) 432 GB/hr (one 1840) 864 GB/hr (two 1840) 576 GB/hr (two 1760) 576 GB/hr (two 960) 216 GB/hr (one 920) 432 GB/hr (two 920)	1.0 TB/hr (two 3280/3000) 2.0 TB/hr (four 3280/3000) 864 GB/hr (two 1840) 1.7 TB/hr (four 1840) 576 GB/hr (two 1760) 576 GB/hr (two 960) 1.1 TB/hr (four 960)
	Compressed (2:1)	1 TB/hr (one 3280/3000) 864 GB/hr (one 1840) 576 GB/hr (one 1760) 576 GB/hr (one 960) 864 GB/hr (two 920)	1.0 TB/hr (one 3280) 2.0 TB/hr (two 3000) 864 GB/hr (one 1840) 1.7 TB/hr (two 1840) 1.1 TB/hr (two 1760) 1.1 TB/hr (two 960) 432 GB/hr (one 920) 864 GB/hr (two 920)	2.0 TB/hr (two 3280/3000) 4.0 TB/hr (four 3280/3000) 1.7 TB/hr (two 1840) 3.4 TB/hr (four 1840) 1.1 TB/hr (two 1760) 1.1 TB/hr (two 960) 2.3 TB/hr (four 960)
			MSL2024	MSL4048
				MSL8048/8096



Technical Specifications

Dimensions	Out-of-Box (HxWxD)	3.4 x 18.9 x 31.7 in (8.7 x 48 x 80.6 cm)	6.9 x 18.9 x 31.7 in (17.5 x 48 x 80.6 cm)	13.9 X 18.9 X 31.7 in (35.2 x 48 x 80.6 cm)
	Shipping (HxWxD)	10.7 x 23.2 x 38.9 in (27.1 x 58.9 x 98.7 cm)	13.7 x 23.2 x 38.9 in (34.8 x 58.9 x 98.7 cm)	26 X 25.8 X 40.1 in (68.5 x 65.5 x 102.5 cm)
Weight	Out of box	32.9 lb (14.9 kg)	47.2 lbs (21.4 kg)	102.7 lbs (46.6 kg)
	Shipping	56.9 lb (25.8 kg)	74.7 lbs (33.9 kg)	164 lbs (74.4 kg)
Reliability	MSBF (mean swaps between failures)	2 Million robot load/unload cycles		
	MTBF (mean time between failures)	100,000 hours (based on 1M MSBF)		
Average Cartridge Swap Time (drive to slot, slot to drive)		45 seconds	45 seconds	50 seconds
Initialization Time		80 to 120 seconds		
Inventory Time		1:20 minutes (using bar code labeled cartridges)	2:15 minutes (using bar code labeled cartridges)	4:30 minutes (using bar code labeled cartridges)
Average Cartridge Swap Time in Extended Libraries (drive to slot, slot to drive)	Extended Library Configuration			Average Swap Time
	2024/4048			100 seconds
	4048/4048			98 seconds
	2024/8096			110 seconds
	4048/8096			110 seconds
NOTE: Two MSL2024s or two MSL8096s are not supported configurations MSL8048 must have all 96 slots enabled prior to using the Library Extender. Once all 96 slots have been enabled for use, the supported configurations are the same as 8096s.				
Connectors		Mini-SAS (located on back of MSL SAS model only) -LTO3 and LTO4; 3Gb/s - LTO5; 6Gb/s 68-pin HDTs (located on back of MSL SCSI models only) 320Mbytes/sec LC Optical Fibre (located on back of MSL FC models only) -LTO3 and LTO4; 1,2 or 4Gb/s -LTO5; 2,4 or 8Gb/s(1) RJ-45 (located on back of MSL Library) (Manufacturing use only, 115Kbaud) (1) USB port (located on back of MSL Library) , USB 2.0 interface		
LED Indicators (on front panel)		Ready LED (Green): shows ready status information Clean LED (Amber): shows fault status information Attention LED (Amber): shows fault status information Error LED (Amber): shows fault status information		
Management Interface		10/100 Mbytes/second, auto-configuring interface. RJ-45 connection. Https configurable.		
Power		MSL2024: 168 Watts (max) MSL4048/MSL8048/MSL8096: 312 Watts (max)		
Input Requirements		100 to 240 VAC, 50 to 60 Hz, 2.5 Amperes		



Technical Specifications

Relative Humidity (non-condensing)	Operating	20% to 80%
	Shipping	20% to 90%
Temperature Range (wet bulb)	Operating	50° to 95° F (10° to 35° C)
	Shipping	-22° to 140° F (-30° to 60° C)
	NOTE: Library operating temperature limits are based on the industry standard tape limit.	
Altitude	Operating	15,000 ft (3048 m)
	Shipping	35,000 ft (10,675 m)

© Copyright 2012 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For tape drives and media, 1 GB = 1 billion bytes. Actual formatted capacity is less.

